



WX150 WiFi6

WiFi6 Air Expert® Test Set

The WX150 test set is a compact and lightweight addition to the WiFi Air Expert family. It provides all the tools necessary for WiFi networks discovery, survey, optimization, performance testing and troubleshooting in a compact form factor.



With countless deployments including residential, private and public Hotspots, managed SMBs and hospitality services, WiFi is both a source of great opportunities and challenges for carriers. Customer expectations are high but they have very limited knowledge of the technologies' environmental limitations or best practices, leading to numerous service calls.

VeEX's WiFi Air Expert provides the tools for reliable, repeatable install procedures that go beyond RF layer analysis. It provides complete performance testing that measures end user's experience under traffic load.

Service calls and end user frustration can often be traced to the common complaint of a "slow network." The Air Expert's V-Perf test can help to unequivocally prove the WiFi network's capacity. With configurable data transmission rate and Pass/Fail threshold, technicians can quickly establish whether the achieved upload and download rates meet SLA requirements and readiness for high bandwidth traffic like audio and video streaming.

Platform Highlights

- Supports detection and connection to:
 - 802.11a/b/g/n/ac/ax devices
- Discovers networks and lists Access Points, Clients and Channels in table and/or graphical format
- AP detailed capabilities discovery including SSID, BSSID, channels, security, supported data rates, signal and noise levels, co-channel and adjacent APs and associated clients
- Survey coverage problems with signal and noise levels tracking
- Analyze Channel usage by utilization and number of APs
- Discover associated and non-associated WiFi Clients present in the network
- One button Auto-Test evaluates the health of the WiFi network with analysis of security, coverage, interference, top talkers and connectivity with configurable AP list
- Connectivity testing with DHCP connection to APs, Ping, Trace Route and ARPWiz
- Verify network performance with dual ended V-Perf Upload/Download throughput testing
- Ethernet 10/100/1000-T and 1000-X ports to verify end-to-end throughput performance
- Ethernet connectivity and PoE testing
- Optional dual band 2.4 GHz and 5 GHz spectrum analyzer to easily discover and identify WiFi and non-WiFi interference

Key Features

Discover Your Network


The Air Expert scans the WiFi network for 802.11 a/b/g/n/ac/ax APs and Clients. Results are provided in table and graphical format.

AP Discovery

AP Scan		AP Graph	Signal Level View		Channel View	
	SSID	BSSID	PHY	Max Rate	Chl	
✓	V-AMPLIFI-Router-5	02:92:BF:94:2B:96	ax,ac,n	3466Mb/s	100+	WPA2
✓	HUAWEI	D8:A4:91:F2:3C:48	ax,ac,n	866Mb/s	36+	WPA3
✓	HUAWEI	D8:A4:91:F2:3C:44	ax,n,g,b	400Mb/s	1+	WPA3
✓	[hidden]	FE:92:BF:94:2B:97	ax,n,g,b	346Mb/s	11	WPA3
✓	[hidden]	F4:92:BF:94:2B:97	ax,n,g,b	346Mb/s	11	WPA2
⚠	[hidden]	D8:A4:91:F2:3C:49	ax,n,g,b	400Mb/s	1+	WPA2
⚠	OPX-BOXe #097541	A0:2C:36:9C:7F:A5	g,b	54Mb/s	1	WPA2
✓	VeEX IPv6 Test	20:3D:66:56:9F:70	n,a	300Mb/s	149+	WPA2
⚠	CBCI-B8DB-2.4	54:B2:03:41:64:08	n,g	216Mb/s	1	WPA2
⚠	DIRECT-	32:C9:AB:29:14:DC	n,g	72Mb/s	11	WEP
⚠	Tenda-2.4	50:0F:F5:B6:9F:D1	n,g,b	144Mb/s	9	WPA2

Stop Scan

Details

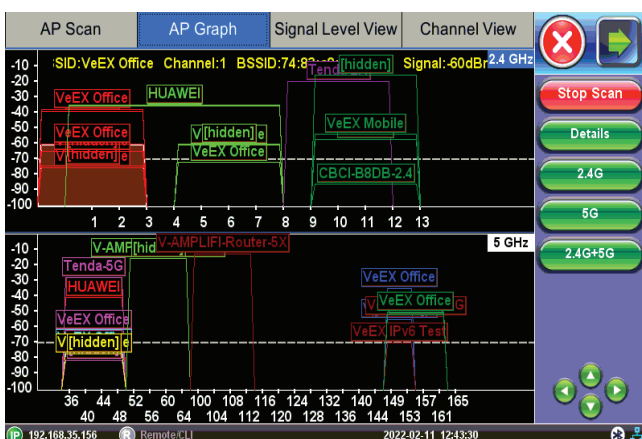

Scan results include AP detailed capabilities: SSID, BSSID, channels, security, supported data rates, signal and noise levels, SNR, co-channel and adjacent channels AP, BSS load, associated clients. Warning signs alert technicians about AP configuration issues as well as if any measurements go beyond user configurable thresholds. The table view can be filtered by any field in order to help in troubleshooting, while the graphical view provides an easy to understand picture of co-channel and adjacent channel interferers.

Clients Discovery

MAC	Associated AP SSID	Max AP Rate	Chl	WPA
✓ 32:D2:6C:6F:33:30	VeEX Mobile	216Mb/s	11	WPA2
✓ F8:4D:89:65:6D:48	VeEX Office	1733Mb/s	48	WPA2
✓ F4:5C:89:B5:E3:C3	VeEX Office	800Mb/s	149	WPA2
⚠ 4E:DC:C6:21:A9:1A	VeEX Office	1733Mb/s	40	WPA2
✓ F6:3B:25:9A:66:14	VeEX Office	1733Mb/s	44	WPA2
✓ A0:AF:BD:3D:B1:0C	VeEX Mobile 5G	1299Mb/s	153	WPA2
⚠ 72:5F:BE:E6:2C:15	VeEX Office	346Mb/s	1	WPA2
⚠ 0E:8A:F4:C9:26:D1	VeEX Office	1733Mb/s	161	WPA2
✓ 60:57:18:FF:4D:03	VeEX Office	1733Mb/s	161	WPA2
⚠ F8:4D:89:63:E6:C9	VeEX Office	1733Mb/s	161	WPA2
✓ 3C:06:30:5A:50:87	VeEX Office	1733Mb/s	161	WPA2
✓ 28:39:5E:51:60:14	VeEX Mobile	216Mb/s	11	WPA2

The Air Expert Client scan function monitors all WiFi channels to detect WiFi clients with the SSID they are associated to, as well as non-associated clients (clients not connected to an AP). Network administrators can ensure that the devices are authorized on the network by checking against their MAC address and manufacturer information as well as monitor the client's activity.

Channel Utilization Discovery

With WiFi as a shared medium, all devices on the same channel share air time. An AP located on a channel with active co-channel APs or adjacent channel APs will lead to lower performance as they are competing for the same available air time.

The Air Expert Channel scan function provides a view of channel utilization in table format to quickly identify channels with high utilization.

AP Scan

AP Graph

Signal Level View

Channel View

Channel	# of APs	Best Signal	Overlapping APs	Max Overlap
1	6	-39dBm	0	N/A
2	0	N/A	11	-35dBm
3	0	N/A	11	-35dBm
4	0	N/A	5	-35dBm
5	0	N/A	5	-35dBm
6	5	-35dBm	1	-35dBm
7	0	N/A	8	-15dBm
8	0	N/A	8	-15dBm
9	0	N/A	5	-15dBm
10	1	-20dBm	4	-20dBm
11	4	-15dBm	1	-15dBm

Stop Scan

Details

2.4G

5G

2.4G+5G

IP 192.168.35.156

RemotaCell

2022.02.11 12:43:39


AP Scan	AP Graph	Signal Level View	Channel View
Channel	#	Channel Details	
1	8	Channel: 1	
2	0	# of APs: 8	
3	0	Best Signal: -38dBm	
4	0	Overlapping APs: 0	
5	0	Max Overlap: 0dBm	
6	6	Min Freq: 2.402GHz	
7	0	Center Freq: 2.412GHz	
8	0		
9	0		
10	1		
11	6		

Detailed channel measurements can be sorted by any field including utilization %, number of APs, number of co-channel APs and strongest signal. This information is crucial as technicians need to identify if performance issues are linked to high channel utilization and must quickly decide if reconfiguring the AP to a new channel is advisable.

Survey Your Network

Level Tracking

A required step for any installation is to survey the facility for proper coverage with a site walk through. The Air Expert Level tracking function facilitates this step by providing Signal and Noise levels tracking in graphical and table format.

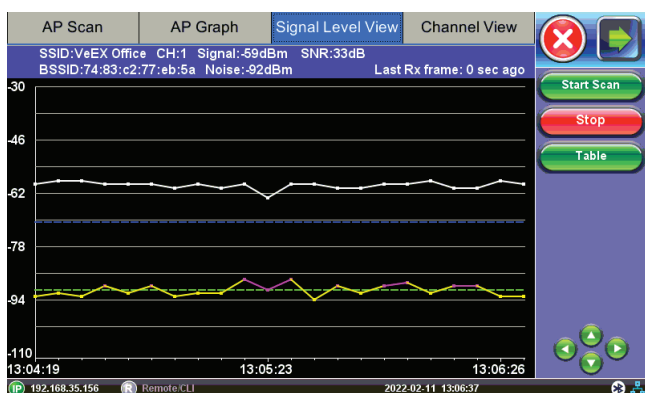

With user configurable thresholds, it is easy to pinpoint where the Signal or Noise levels fall below acceptable quality and ensure site readiness. With a set of pre-configured and configurable location labels, add location information to your measurements to create a full record of the facility walk through.

Time	Signal Level	Noise Level	SNR
13:05:55	-59	-89	30
13:06:01	-59	-88	29
13:06:08	-58	-91	33
13:06:14	-60	-89	29
13:06:20	-60	-89	29
13:06:26	-58	-92	34
13:06:33	-59	-92	33
13:06:39	-59	-89	30
13:06:45	-59	-92	33
13:06:52	-56	-92	36
13:06:58	-57	-91	34

AP Scan | AP Graph | **Signal Level View** | Channel View

SSID: VeEX Office CH: 1 Signal: -59dBm SNR: 31dB
BSSID: 74:83:c2:77:eb:5a Noise: -90dBm Last Rx frame: 0 sec ago


Start Scan | Track Level | Graph | Locate

13:05:55 | 13:06:01 | 13:06:08 | 13:06:14 | 13:06:20 | 13:06:26 | 13:06:33 | 13:06:39 | 13:06:45 | 13:06:52 | 13:06:58


192.168.35.156 Remote.CLI 2022-02-11 13:08:45

Connectivity Testing

To ensure that network connectivity is available, the Air Expert emulates a client and connects to an AP with customer credentials. Supported security protocols include WEP, WPA, WPA2, and WPA3 as well as Splash page/Captive portal webpage login. The interface allows the technician to review association and authentication status, and provides detailed information about network parameters: assigned IP address, Gateway, DHCP server and DNS server addresses.

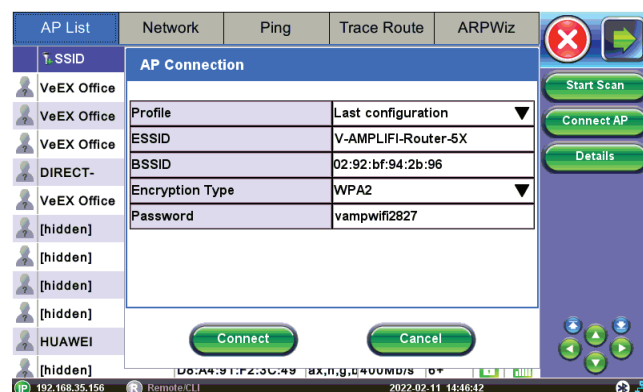

Network troubleshooting tools Ping and Traceroute verify connectivity to the internet while the ARPWiz application discovers the local network.

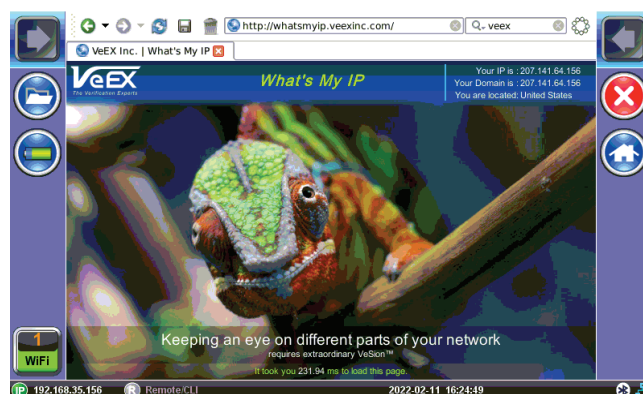



Optimize Your Network

V-Perf Throughput Testing


Surveying the RF environment is a good first step for any installation to determine network performance in terms of coverage and connectivity. But real time and bandwidth-hungry applications like video and audio streaming, place a traffic load strain on the network that cannot be properly assessed with RF metrics alone. The customer's true Quality of Experience (QoE) can only be measured with traffic loads simulating an end user's application data traffic. The Air Expert V-Perf dual-ended upload and download traffic test evaluates the network's performance under load and measures QoE parameters from an end user's point of view.

Technicians can quickly establish whether the achieved upload and download rates meet SLA requirements and readiness for high bandwidth traffic like audio and video streaming, with pre-configured profiles for common applications (Netflix, YouTube, Skype, VoIP....).

V-Perf dual-ended test is compatible with iPerf3 servers, Air Expert or companion V-Probe responders, connected directly on the back of the AP 10/100/1000T to perform WiFi to Ethernet data throughput tests. The test can also be performed to a cloud-based server, qualifying WiFi and Broadband access bandwidth in one step.

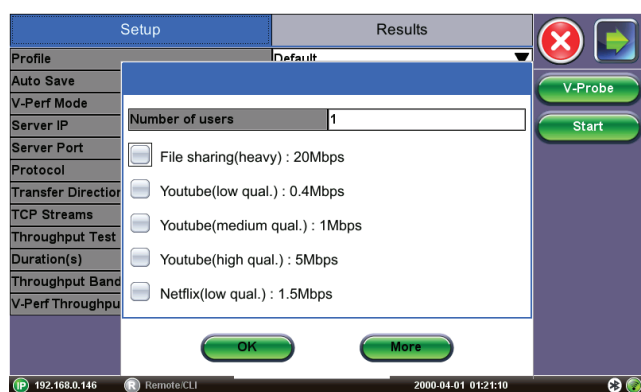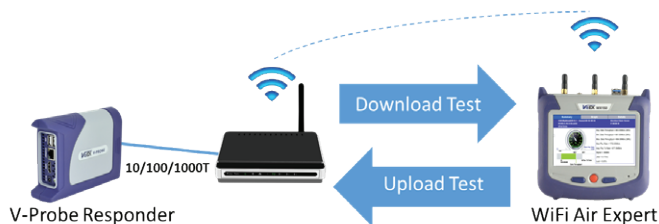

Service calls and end user frustration can often be traced to the common complaint of a "slow network." The Air Expert's V-Perf test can help to unequivocally prove the WiFi network's capacity. With configurable data transmission rate and Pass/Fail threshold, technicians can quickly establish whether the achieved upload and download rates meet SLA requirements and readiness for high bandwidth traffic like audio and video streaming.

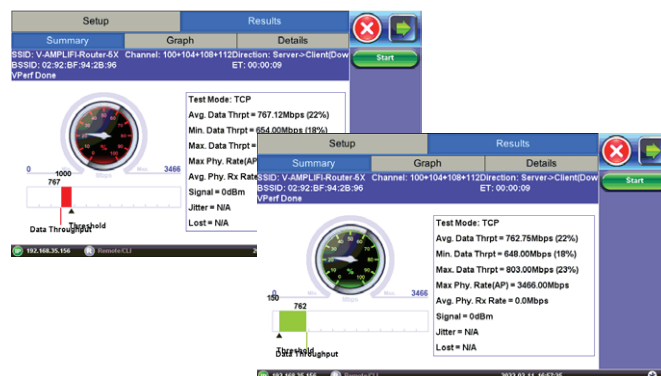

V-Probe Responder

The V-Probe Responder is a companion accessory for the Air Expert, and can be used as a V-Perf TCP/UDP test responder on the 10/100/1000BaseT interface. Quick to setup, V-Probe is discovered, controlled and configured directly from the Air Expert user interface. This allows technicians to quickly quality the air interface performance through the customer's WiFi Access Point.



Site Survey Map

In site survey mode, user marks his/her location on the map and V-Perf measurement are associated with the user's location.

Troubleshoot Your Network

WiFi Spectrum Analyzer

With the 2.4 GHz and 5 GHz RF frequency bands open for unlicensed use, WiFi's frequency bands are available for anyone to use. The 2.4 GHz frequency band is especially popular and crowded. It is used by many common RF emitting devices including cordless phones, Bluetooth, Zigbee, baby monitors, wireless audio or security systems. All of these devices constitute sources of non-WiFi interference. They emit frequencies either on a single narrow frequency range like Zigbee, or frequency hopping across the entire spectrum, like Bluetooth, or continuously emitting across the entire spectrum, like a microwave oven. These interferers do not follow WiFi protocol rules, so interference can start while WiFi devices are in the middle of a transmission and last for an unknown duration. In some cases, WiFi will attempt to continue operation in the presence of RF interference by automatically switching to a lower data rate, which slows the use of wireless applications. In the worst case, if the interference source is strong and constant, the WiFi devices will hold communications until the interfering signal goes away completely.



Many highly disruptive and intermittent WiFi performance issues can be traced to non-WiFi interferers. But unless technicians are armed with a specialized spectrum analyzer, they will be powerless in detecting these interference sources since traditional WiFi network scanning tools can only discover 802.11 WiFi devices.

The Air Expert offers a dedicated spectrum analyzer that displays all RF activity – WiFi and non-WiFi interferers – in the 2.4 GHz and 5 GHz bands. The Spectrum Analyzer view allows technicians to visualize interference sources overlapping with the AP under test. The WiFi interference library can also be used to identify interference signatures against a list of known interferers (Cordless phones, Zigbee, Bluetooth, etc.).

Secure Your Network

WiFi Locate Function

If suspected rogue APs or Clients are present on the network, the Air Expert locate function can be used to track the physical location of the device. The function monitors the strength of the signal, and reports progress.

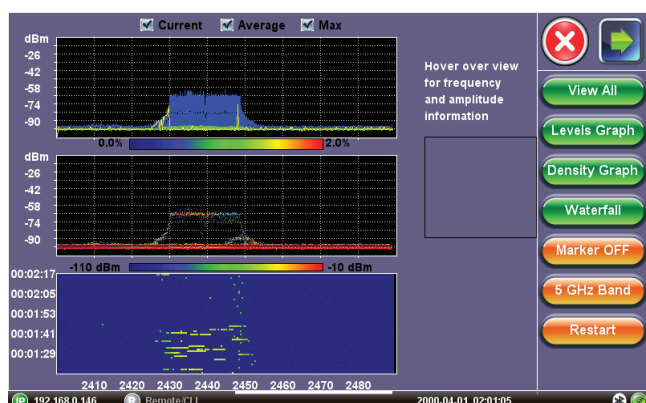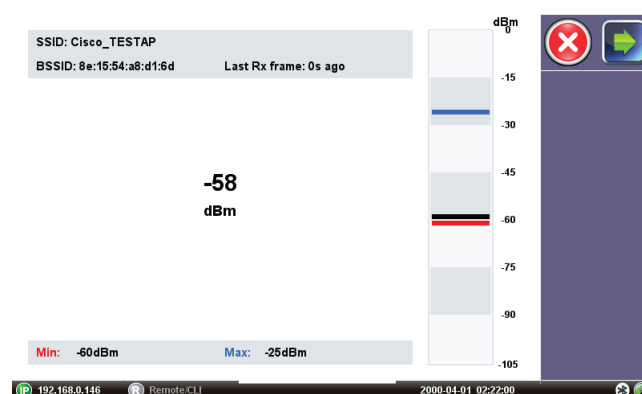


Automate Testing

Auto Test Function

WiFi performance is highly dependent on environmental factors. RF signals can be attenuated or blocked by physical obstacles like large metallic objects or concrete walls, neighboring APs with high traffic load can reduce performance, and non-WiFi interference sources, like cordless phones, video cameras or baby monitors, can disrupt WiFi transmission.

Since environmental factors will vary from location to location, no two installs will face the same challenges. Yet it is important to follow a repeatable install procedure to ensure consistency in the service level provided to the end user.

The Air Expert Auto Test function provides an automated, reliable and repeatable installation routine. With configurable test profiles for consistency, and test results clearly marked with Pass, Fail or Warning status, technicians are provided with an easy-to-use and comprehensive site assessment routine.

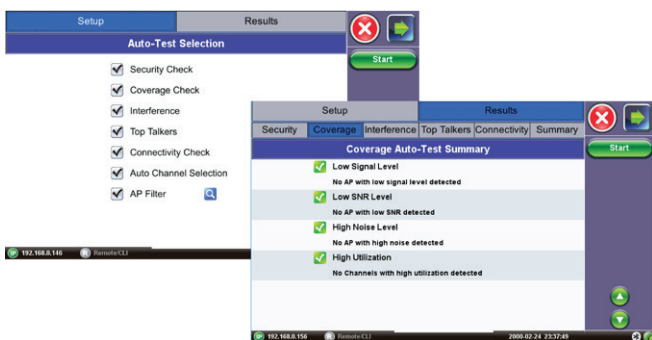

Test Your Wired Network

Test Interfaces

The Air Expert is optionally fitted with an RJ45 10/100/1000BaseT Ethernet interface and an SFP 1000Base-X interface. This allows technicians to verify or troubleshoot the wired access network and broadband access.

IP Tools

Provides Ethernet and Internet connectivity verification and troubleshooting tools, supports: IPv4 (Static, DHCP) and VLAN. Network troubleshooting tools Ping and Traceroute verify connectivity to the internet while the ARPWiz application discovers the local network.

PoE Test

The Power over Ethernet test function supports emulation of Powered Device and allows technicians to identify the pairs used. This function also measures PoE voltage.

V-Perf Throughput Testing

V-Perf dual ended test is compatible with iPerf3 servers, or an Air Expert test set connected on the WiFi interface to run Ethernet to WiFi data throughput test. The test can also be performed to a cloud-based server, to qualify WiFi and Broadband access bandwidth in one step.

With configurable data transmission rate and Pass/Fail threshold, technicians can quickly establish whether the achieved upload and download rates meet SLA requirements and readiness for high bandwidth traffic like audio and video streaming.

Document Your Network

Remote Access

The WX150 offers multiple ways for Remote Control or access to the information remotely (i.e. test results, test profiles, etc.).

The test set can be reached via:

- ReVeal PC software
- Web browser (Web Remote Control)
- VNC® Client
- Management Port Connectivity: Wi-Fi 802.11 b/g/n

Report Generation

Test results generation in PDF format

Export test results and profiles via USB memory, Bluetooth, web browser, Data Card or ReVeal companion PC software

VeSion® R-Server Client Option

Part of VeEX's VeSion® centralized monitoring and management solutions, the R-Server Workflow and Asset Management system provides crucial tools to manage fleets of technicians, test equipment, standardized test profiles, thresholds, centralized test results collection, reporting, jobs/ticketing, and software update delivery to create coordinated and efficient disciplined workforce and test procedures. R-Server enhances the workflow to achieve the level of quality and repeatability required by telecommunications service providers, MSOs and their contractors. The flexible R-Server can be deployed in cloud, hosted, and corporate networks, on physical or virtualized servers.

Makes the job simpler for field technicians as they can download test profiles and upload test results. Supervisors can preset and upload test parameters which are provided to the test sets as profiles. Technicians can simply download profiles, run tests, and upload results to a centralized system that stores and secures the data. No need to worry about losing test results ever again.

Advanced Management

This option allows users to append work order information to test results (i.e. Job ID, account, location, comments)

- Compatible with R300 Productivity Server (R-Server)
- Authorized test sets can register with specific VeSion R300 Server
- Test results can be uploaded via Bluetooth or WiFi

**Requires optional WiFi USB adapter*

Specifications

	WiFi 6 Module
Wireless Standards	802.11 a, b, g, n, ac, ax
WiFi Data Rates	<ul style="list-style-type: none"> • 802.11 a: up to 54 Mbps • 802.11 b: up to 11 Mbps • 802.11 g: up to 54 Mbps • 802.11 n: up to 450 Mbps <ul style="list-style-type: none"> - BPSK, QPSK, 16-QAM, 64-QAM - MCS0~15 • 802.11 ac: up to 1.3 Gbps <ul style="list-style-type: none"> - MCS 0~9 • 802.11 ax: up to 10.53 Gbps <ul style="list-style-type: none"> - HE0~11
Operating Frequencies	<ul style="list-style-type: none"> • ISM: 2.412 GHz to 2.4835 GHz • UNII: 5.15 GHz to 5.35 GHz, 5.47GHz to 5.725GHz, 5.725GHz to 5.85GHz
MIMO Channels	<ul style="list-style-type: none"> • 2x2:2
WiFi Security Standards	<ul style="list-style-type: none"> • 64/128-bits WEP • WPA/WPA2/WPA3 • 802.1x
Output Power	<ul style="list-style-type: none"> • 802.11b: 18.5 dBm @ 11 Mbps • 802.11g: 17 dBm @ 54 Mbps • 802.11n HT20: 13.5 dBm @ MCS7 • 802.11n HT40: 13.5 dBm @ MCS7 • 802.11ac HT80: 9 dBm @ MCS9 • 802.11ax HE20: 13.5 dBm @ HE7 • 802.11ax HE40: 13.5 dBm @ HE7 • 802.11ax HE80: 9 dBm @ HE9
Receiver Sensitivity	<ul style="list-style-type: none"> • 802.11b: ≤-88 dBm @ 11 Mbps • 802.11g: ≤-77 dBm @ 54 Mbps • 802.11n HT20: ≤-73 dBm @ MCS7 • 802.11n HT40: ≤-70 dBm @ MCS7 • 802.11ac HT80: ≤-62 dBm @ MCS9 • 802.11ax HE20: ≤-69 dBm @ HE7 • 802.11ax HE40: ≤-68 dBm @ HE7 • 802.11ax HE80: ≤-60 dBm @ HE9
Wi-Fi Antennas	<ul style="list-style-type: none"> • Antennas (2) <ul style="list-style-type: none"> - Configurable operation with 1 or 2 antennas

General

WiFi Spectrum Analyzer (Optional)

- Frequency Range: 2400 MHz to 2484 MHz and 5000 MHz to 6000 MHz
- Amplitude Range: -100 to -6.5 dBm
- Reverse polarity SMA : 50 Ohms
- Absolute max input power : +10 dBm (over this it can damage the unit)

802.3 Ethernet test ports

- RJ45 10/100/1000Base-T
- SFP 1000Base-X

PoE Testing

- Emulation of Powered Device
- Detect pairs used
- PoE voltage measurement

General Specifications

Size	150 x 150 x 80 mm (5.9 x 5.9 x 3.1")
Weight	1.1 kg (2.4 lbs)
Battery	Lithium-ion battery, 56 Wh with low voltage indication
AC Adapter	Input: 100-240 VAC, 50-60 Hz Output: 15 VDC, 5A
Operating Time	8 hours typical operation
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	5% to 95% non-condensing
Display	5" WVGA 800x480 TFT color LCD touchscreen
Ruggedness	Survives 2m (6 ft) drop to concrete on all sides
Water resistance	May be used in light rain
Interfaces	Micro-USB with On The Go (OTG) support RJ45 10/100/1000 BT
Connectivity	WiFi 802.11 b/g/n, Bluetooth
Languages	Multiple languages can be supported
Certifications	CE & ROHS compliant
Safety Standards	AC adaptor - IEC 61010-1, Class II (GOST 12.2.091)

